

FIG. 4



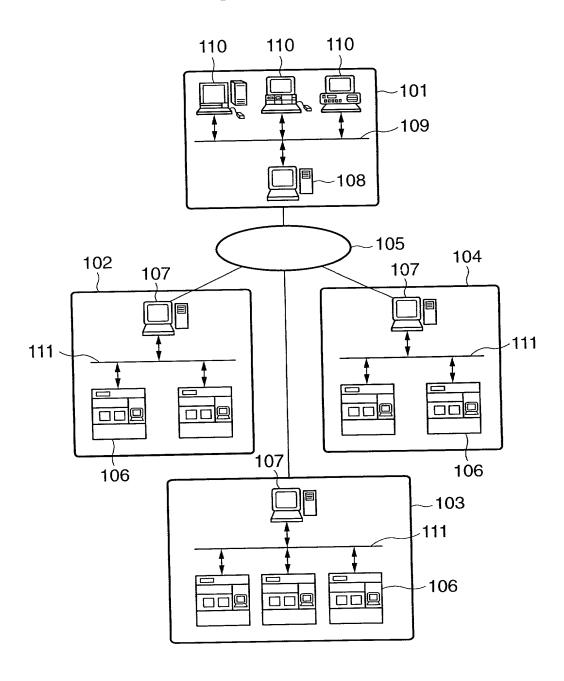



FIG. 5

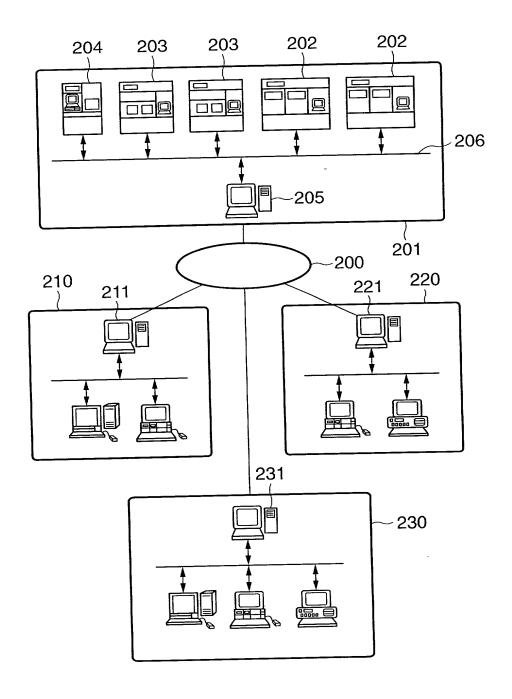

URL http://www.maintain.co.jp/db/input.html
MALFUNCTION DATABASE INPUT SCREEN
DATE OF OCCURRENCE 2000/3/15 ~ 404
MODEL ******** 401
SUBJECT MATTER OPERATING MALFUNCTION (ERROR AT BOOTING) ~403
EQUIPMENT SERIAL NO. S/N 465NS4580001 402
DEGREE OF URGENCY D ~ 405
CONDITION LED CONTINUES FLASHING AFTER 中OWER IS TURNED ON 406
COUNTERMEASURE POWER TURNED ON AGAIN METHOD (RED BUTTON PUSHED AT START UP) 407
PROGRESS TEMPORARY MEASURES COMPLETED 位 408
SEND (RESET) 410 411 412
LINK TO DATABASE OF RESULTS SOFTWARE LIBRARY OPERATING GUIDE

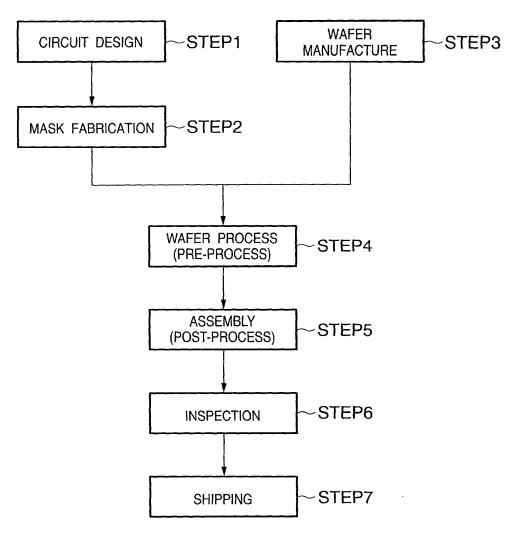

SEMICONDUCTOR DEVICE MANUFACTURING FLOW

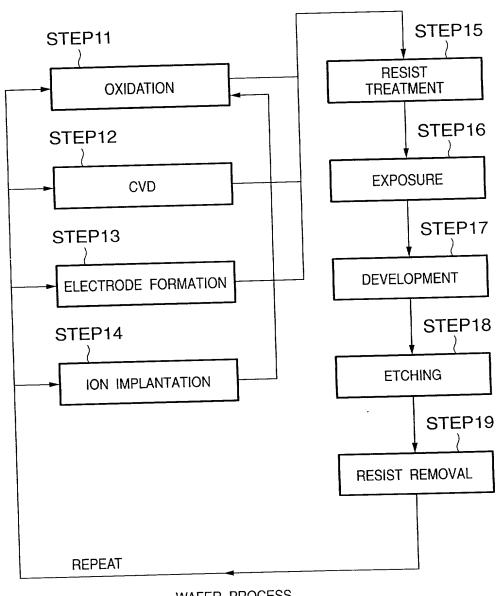

WAFER PROCESS